
## **CUMULUS SERIES (CEILING)**




EXTERIOR | INTERIOR | DSCSP15

\*Any copy hereof issued by CARRITEC must be kept confidential and used by the recipient only for the specific purpose for which it is issued in conjunction with materials supplied or purchased and listed hereon.


\*Dimensions are imperial.

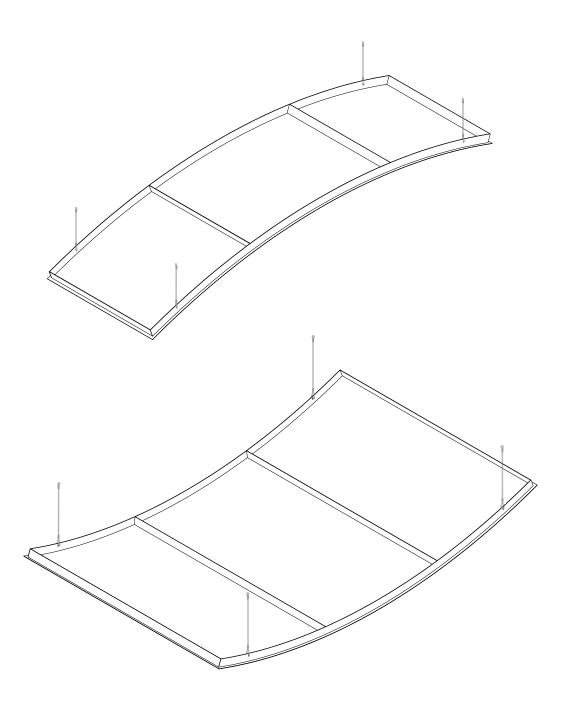

## **CUMULUS SERIES (CEILING)**

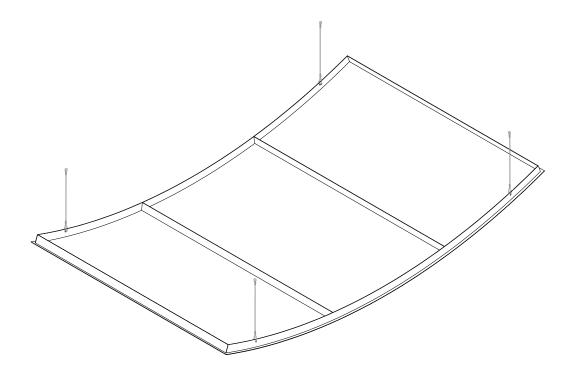

## ISOMETRIC VIEW

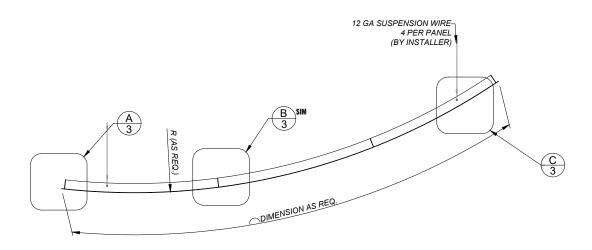

TRANSVERSAL SECTION


EXTERIOR | INTERIOR | DSCSP15

\*Any copy hereof issued by CARRITEC must be kept confidential and used by the recipient only for the specific purpose for which it is issued in conjunction with materials supplied or purchased and listed hereon.

\*Dimensions are imperial.


TOLERANCES (UNLESS OTHERWISE SPECIFIED):

FRACTIONS: + 1/64
ANGLES: ± 0.5
DECIMALS: - .XX ± 0.03
- .XXX ± 0.015





## **CUMULUS SERIES (CEILING)**



DETAIL A EDGE OF PANEL

12 GA SUSPENSION WIRE-4 PER PANEL (BY INSTALLER) STANDARD STIFFENERS (WELDED TO PANEL IN HOUSE) MATERIAL: 16 GA CRS FINISH: TO MATCH PANEL CUMULUS SERIES (CEILING) MATERIAL: AS REQUIRED PERFORATION: TO BE SELECTED FROM CARRITEC STANDARDS ACOUSTICAL: AS REQUIRED FINISH: AS REQUIRED

> **DETAIL C** HANGER DETAIL

**DETAIL B** STIFFENER DETAIL

CARRITEC STANDARDS ACOUSTICAL: AS REQUIRED FINISH: AS REQUIRED

(AS

REQ.)

CUMULUS SERIES (CEILING) MATERIAL: AS REQUIRED PERFORATION: TO BE SELECTED FROM

STANDARD STIFFENERS-(WELDED TO PANEL IN HOUSE) MATERIAL: 16 GA CRS

FINISH: TO MATCH PANEL

EXTERIOR | INTERIOR | DSCSP15

\*Any copy hereof issued by CARRITEC must be kept confidential and used by the recipient only for the specific purpose for which it is issued in conjunction with materials supplied or purchased and listed hereon.

\*Dimensions are imperial.

TOLERANCES (UNLESS OTHERWISE SPECIFIED):

FRACTIONS: ANGLES: ± 0.5 DECIMALS: - .XX ± 0.03

- .XXX ± 0.015

