



PRODUCT DATA SHEET  
**WALL SYSTEM GULLY**



## GULLY

The GULLY wall panel system is an economical exterior system with a progressive installation and interlocking panels. The panels are locked together on four sides with hidden fasteners. The system is typically used when a flat, wide look is desired. The thin gauge material offers low material and installation costs.

### FEATURES

- Thin gauge aluminum or zinc
- Progressive installation
- Interlocking panel system


### BENEFITS

- Most economical option for exterior systems
- Good drainage
- Secure, reliable system
- Flexible in design

### FIRE RATING

All metal wall panels and associated suspension systems are made entirely of noncombustible materials and meet all known code requirements.

### TYPICAL ISOMETRICS & SECTIONS

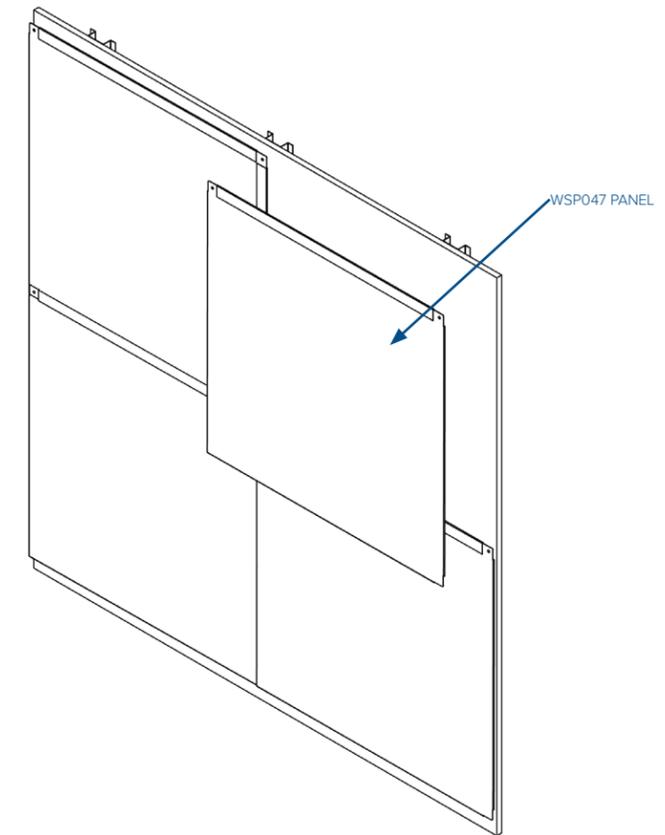

### ALUMINUM

Material to comply with ASTM B 209, alloy and temper recommended by aluminum producer and finish requested, with strength and durability equal to or greater than the properties of the 3003-H14 for painted or laminated finishes and 5005-H14/32 for anodized finish.

Thickness: 0.032" to 0.060"

### ZINC

Material to comply with ASTM B 949, zinc and zinc alloy recommended by mill producer for the finish selected. Panel thickness to be chosen so deflection does not exceed  $L/175$ .

Thickness: 0.032" to 0.060"

# WALL SYSTEM GULLY

---

## COLORS & FINISHES

---

A wide variety of colors and finishes are available. Options shown below are for illustration purposes only. Custom finishes are available on request. Minimum orders and associated lead times may apply to custom options.

### ALUMINUM

---




Anodized



Brushed



Polyester powder coat



Pre-painted or post-painted



Duranar or Kynar



Enamel paint

### WOOD FINISHES

---



Cherry



Maple



Chestnut



White Birch



Walnut

[www.carritec.com](http://www.carritec.com)

[info@carritec.com](mailto:info@carritec.com)

575 Boul Morgan, Baie-d'Urfé, QC H9X 3T6

514 457 7779 | 800 610 0179 | 514 457 5559